

Fantini S.r.l. is located in northern Italy at Medole, near Mantua, 120 Km. from Milan where, on a site covering 17.000 square meters, a 6.000 square meter "plant" has been recently constructed and equipped with high technology production systems. The headers are designed by a team of highly specialized technicians who exploit the most up-to-date CAD systems and who give the maximum consideration to the customers' requirements and suggestions.

Fantini North America is currently based in Blue Earth MN. The storage facility has space to keep all possible stock headers under cover. We have a large selection of header sizes and specifications. There is also an extensive spare parts supply with an efficient and rapid delivery service.

The standard production of Fantini's headers is:

CORN HEADERS - for all types of combines *

| Type | number of rows ¹ | row spacing ² | Type | number of rows ¹ | row spacing ² |
|--|-----------------------------|--------------------------|---|-----------------------------|--------------------------|
| fixed L02 | from 2 to 12 | 28 - 30 - 32 in | foldable LH2 | from 5 to 9 | 28 - 30 - 32 in |
| | from 6 to 12 | 18 - 20 - 22 in | | from 9 to 12 | 18 - 20 - 22 in |
| ¹ different number of rows available on request | | | ² other row spacing available on request | | |

SUNFLOWER HEADERS - for all types of combines *

| Type | number of rows ¹ | row spacing ² | Type | number of rows ¹ | row spacing ² |
|--|-----------------------------|--------------------------|---|-----------------------------|--------------------------|
| fixed G02 | from 2 to 12 | 28 - 30 - 32 in | foldable GH2 | 6 to 8 | 28 - 30 - 32 in |
| | from 6 to 13 | 18 - 20 - 22 in | | from 8 to 12 | 18 - 20 - 22 in |
| ¹ different number of rows available on request | | | ² other row spacing available on request | | |

Foldable headers LH2 - sample of technical specifications *

| N° ROWS | SPACING | TRANSPORT WIDTH | WEIGHT | WEIGHT WITH CHOPPER |
|---------|---------|-----------------|-----------|---------------------|
| 5 ROWS | 30 in | 98,4 in | 3306,9 lb | 3637,6 lb |
| 6 ROWS | 30 in | 124,0 in | 3968,3 lb | 4409,2 lb |
| 7 ROWS | 30 in | 141,7 in | 4850,1 lb | 5291,0 lb |
| 8 ROWS | 30 in | 131,9 in | 5511,5 lb | 5952,5 lb |
| 9 ROWS | 30 in | 141,7 in | 6172,9 lb | 7010,7 lb |
| 9 ROWS | 18 in | 131,9 in | 6327,2 lb | N.A. |
| 11 ROWS | 18 in | 131,9 in | 6834,3 lb | N.A. |
| 12 ROWS | 18 in | 141,7 in | 7165,0 lb | N.A. |

Fixed headers L02 - sample of technical specifications *


| N° ROWS | SPACING | TRANSPORT WIDTH | WEIGHT | WEIGHT WITH CHOPPER |
|---------|---------|-----------------|-----------|---------------------|
| 4 ROWS | 30 in | 120,0 in | 2645,5 lb | 2976,2 lb |
| 5 ROWS | 30 in | 149,6 in | 3306,9 lb | 3637,6 lb |
| 6 ROWS | 30 in | 179,1 in | 3968,3 lb | 4409,2 lb |
| 8 ROWS | 30 in | 238,2 in | 5291,0 lb | 5842,2 lb |
| 9 ROWS | 30 in | 283,5 in | 5732,0 lb | 6613,8 lb |
| 9 ROWS | 18 in | 173,2 in | 5401,3 lb | N.A. |
| 10 ROWS | 18 in | 190,1 in | 5952,5 lb | N.A. |
| 12 ROWS | 18 in | 226,4 in | 7054,8 lb | N.A. |

* Indicative specifications. Fantini S.r.l. has the right to change the specifications without notice.

P
S
T
A
D
A
R
D
I
N
G

CORN HEADERS LH2 - L02

CORN HEADERS

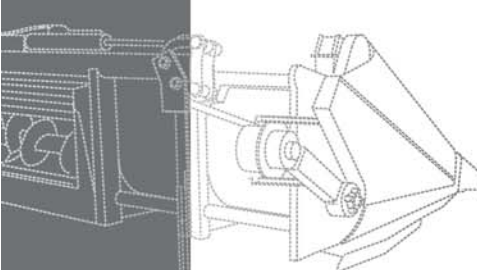

Advanced technology and improved production

A wealth of technical experience, accumulated in over 35 years of header production, constantly being broadened by new solutions and applications
 High quality materials
 Highly qualified technicians
 Production departments using the latest technology
 Robot welding machines
 Extensive field testing & evaluations performed by highly qualified technicians

Spare parts service

An on site spare parts warehouse constantly re-supplied
 Authorized spare parts distributors

Accessories on request:

Stalk choppers
 Side augers: left and / or right
 Transmission boxes with interchangeable gears to enable header operation at different forward speeds
 Torque limiting device for the feeding auger
 Double transmission
 Hydraulic kits
 Road safety lights
 Sunflower harvesting kit



Foldable headers LH2
Fixed headers L02



- 1 New row units with the clutch incorporated in a sealed gear box**
 The cast iron box contains extremely high technology hardened steel gears, protected by a torque limiting device in an oil bath. It assures exceptional life and kinematics safety.
- 2 New removable stalk choppers**
 They are connected and disconnected using a conveniently placed lever. Each chopper is made of a box directly connected to the row units, thus avoiding the need for additional transmissions. It is fitted in a central / rear position and is equipped with a wide diameter steel cutting disc. The disc, with 2 tungsten carbide edged knives / allows you to cut down the stalks perfectly, with a low power requirement.
- 3 New transmissions with conical and universal joint couplings**
 The old gears with chains and chain turnbuckles, which always needed adjusting and lubricating, are now just a thing of the past. The new system has conical and universal joint couplings, is maintenance free and makes operating extremely safe, silent and long lasting.
- 4 Heavy Duty Closed ring harvesting chains**
 They are automatically spring adjusted, and are made of heavy duty steel gears, guaranteeing exceptional life in all kinds of working conditions.

- 5 Stalk roll and counter-rotating knives**
 Each roller has four adjustable steel, tungsten carbide edged knives, ensuring the perfect feeding and pre-chopping of the stalk. A scraper knife prevents grass from wrapping around the roller. The rollers are supported at the front and have helical, conical tips to help prevent the insertion of the stalk.
- 6 Deck plates adjustable from the drivers seat**
 The distance between the deck plates can be adjusted directly from the combine cab.
- 7 Feeder house adapter**
 They can be easily replaced and are adjustable, allowing modification of the header angle.
- 8 Mechanically driven side augers**
 The auger's regular and constant rotation makes the collection of flattened corn stalks much easier.
- 9 Plastic cowling for models with spacing of 28", 30" & 32"**
 It does not need maintenance and does not deteriorate. The sliding of the stalk when flattened, is improved and the fall of the cob is better absorbed.